


## UNITRONIC® LAN 250 - Cat.6

Fixed installation

LAN cables for structured building cabling according to EN 50173 and ISO/IEC 11801

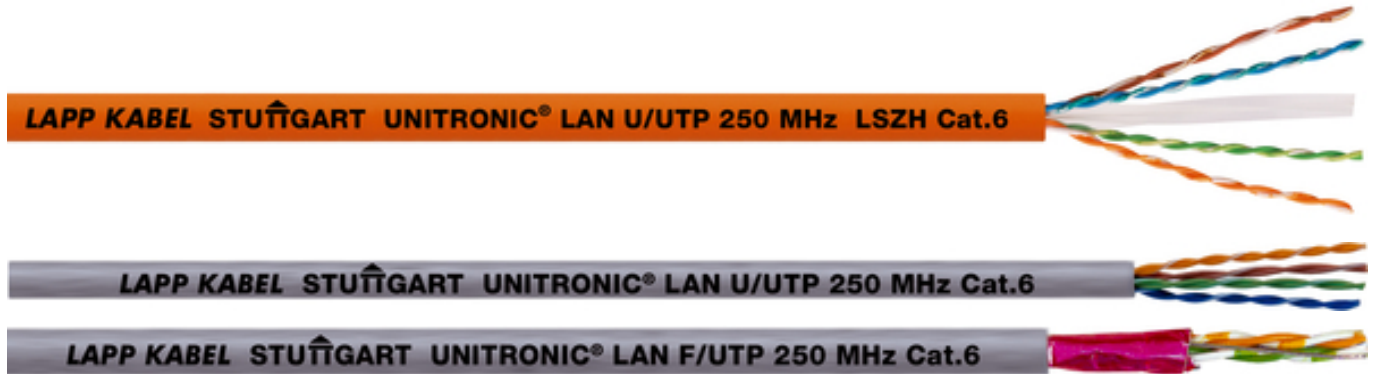

Single halogen-free cable



Interference signals

### Application range

Mainly used where the terminal density is very high, e.g. for wiring office, administration and development buildings in the tertiary area (floor wiring).

### Product Make-up

Solid conductor

U/UTP: no overall or pair shielding

F/UTP: foil screening as overall screening

outer sheath either as PVC (color grey RAL1015) or LSZH (color orange RAL2003)

### Norm references / Approvals

Class E out of the standard ISO/IEC 11801 corresponds to CAT.6

LAN CAT.6 cables from Lapp Kabel for "Structured Cabling Systems" meet the requirements in accordance with EIA/TIA-568 and TSB36, as well as ISO/IEC 11801 or EN 50173 (Class E - permanent link).

### Product features

Transfer of digital and analogue data signals

LAN Cat.6 cables are specified up to 350 MHz

IEEE 802.3: 10/100/1000Base-T

IEEE 802.5: ISDN; FDDI; ATM

### Technical Data

Minimum bending radius:	during installation: 8 x outer diameter Fixed installation: 4 x outer diameter
Temperature range:	Operating temperature: -20 °C to +60 °C During installation: 0 °C to +50 °C
Characteristic impedance:	100 Ohm +- 15%

### Note

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.

Please find our standard lengths at: [www.lappkabel.de/en/cable-standardlengths](http://www.lappkabel.de/en/cable-standardlengths)

Packaging size: Coil 100 m; Drum (500; 1000) m

Detailed data sheets are available upon request. Please specify the type/dimensions of the required cable.

Photographs are not to scale and do not represent detailed images of the respective products.

**UNITRONIC® LAN 250 - Cat.6**

Part number	Article designation	Number of pairs and AWG per conductor	Max. outer diameter (mm)	Copper index (kg/km)	Weight (kg/km)
PVC versions					
2170186	250 U/UTP Cat.6	4 x 2 x AWG24/1	6,5	18.0	46
Halogen-free versions					
2170193	250 U/UTP Cat.6 LSZH	4x2xAWG24/1	6,5	18.0	46
2170194	250 F/UTP Cat.6 LSZH	4x2xAWG24/1	7,5	19.0	54